



This PDF is generated from authoritative online content, and is provided for convenience only. This PDF cannot be used for legal purposes. For authoritative understanding of what is and is not supported, always use the online content. To copy code samples, always use the online content.

User's Guide

Set Conversation Expiration

Set Conversation Expiration

Context Services includes granular expiration capabilities for conversations. You can configure expiration dates by type of conversation identified in the `service_type` attribute of a service instance, instead of instancing purge scenarios.

The conversation data remains valid from the date where you start or update the associated service, till its expiration date. At expiration, the conversation data (all its service, states, and tasks) is removed from the database.

Important

By default, expiration date is set to 5 years (5y). Starting 8.5.105, you can also update the expiration time with a **POST API** query.

Contents

- **1 Set Conversation Expiration**
 - **1.1 More about the Expiration Option**
 - **1.2 Configuring Default Expiration Time**
 - **1.3 Configuring Expiration for a Specific Conversation Type**

More about the Expiration Option

You can configure the expiration date in the Context Service application or in the Business Attributes mapped with services (see below). The expiration attribute must match the following formatting:

`expiration = <integer><letter>`

where:


- `<integer>` specifies the time period
- `<letter>` is one of the following period type:
 - s: seconds
 - m: minutes
 - h: hours
 - d: days
 - w: weeks (7 days)
 - M: months (30 days)
 - y: years (365 days)

For example, setting `expiration=2w` means that data inserted or updated using the Context Services API will last 2 weeks.

Important

If you set or change the expiration option, it applies only to further created conversations. The option is not retroactive and does not apply to conversations created or updated prior to the configuration change.

Configuring Default Expiration Time

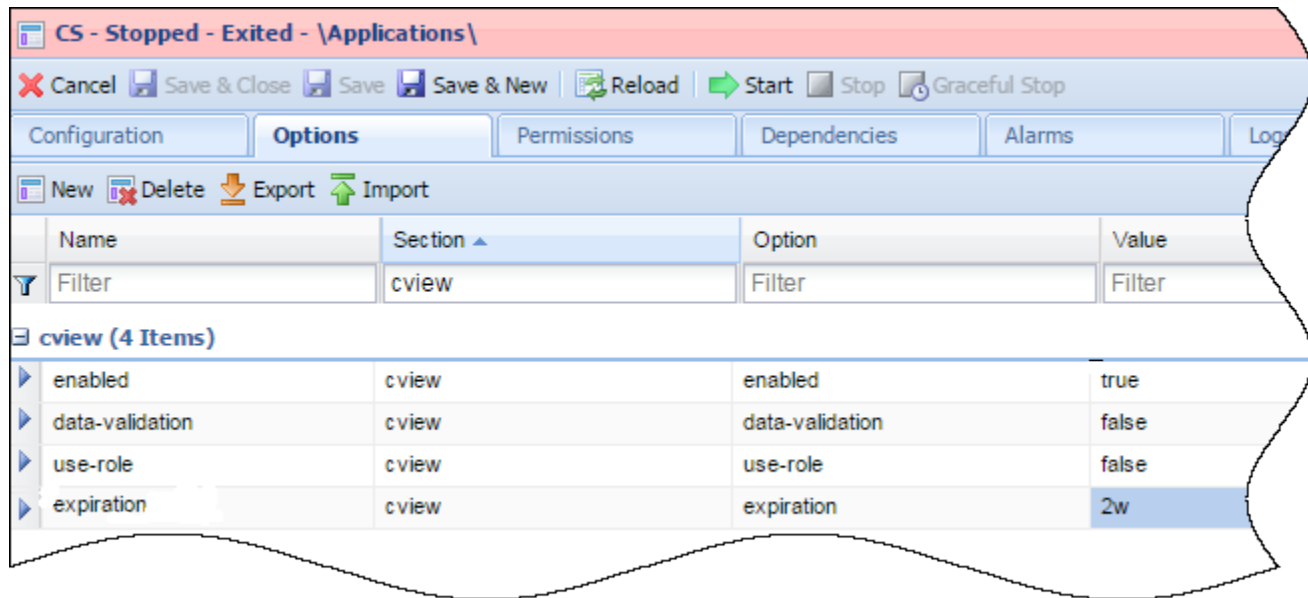

In Genesys Administrator, open your application and in the **Options** tab, edit the cview/exp attribute.

Set its property to the appropriate value.

Click **Save** to apply the change to new conversations.

Configuring Expiration for a Specific Conversation Type

You can configure an expiration time for Business Attributes mapped with Service.type in Context Services

The first screenshot shows the 'CS - Stopped - Exited - Applications' window. The 'Options' tab is selected, and the 'business-attributes' table is displayed. The 'business-attributes/Service.type' row is highlighted, showing its value as 'ContextManagementService'.

The second screenshot shows the 'Attributes Values' dialog box for 'ContextManagementService'. The 'expiration' setting is set to '4d'.

To overwrite the default expiration for a given service type, you must first set up Business At mapping for Service.type resources. See [there](#) for details. Then, you can edit the Business mapped with your service type and add the setting/expiration option to its configuration.

In our example, Service types are mapped with ContextManagementService Business Attrib values:

business-attributes/Service.type=ContextManagementService

To set a specific expiration time of your Business Attribute value, edit its configuration and add `settings/expiration=<integer><letter>` to the **Options** tab.

Important

The expiration time set in Business Attribute values is taken into account after restarting Context Services or making configuration changes in Context Services.
