



This PDF is generated from authoritative online content, and is provided for convenience only. This PDF cannot be used for legal purposes. For authoritative understanding of what is and is not supported, always use the online content. To copy code samples, always use the online content.

Genesys Events and Models Reference

Special Events

12/18/2025

Contents

- 1 Special Events
 - 1.1 EventACK
 - 1.2 EventAgentReserved
 - 1.3 EventCallInfoChanged
 - 1.4 EventPrivateInfo
 - 1.5 EventUserEvent
 - 1.6 EventPrimaryChanged
 - 1.7 EventRestoreConnection
 - 1.8 EventHardwareError
 - 1.9 EventResourceAllocated (Obsolete—No Longer Supported)
 - 1.10 EventResourceFreed (Obsolete—No Longer Supported)

Special Events

EventACK

Description

T-Server has acknowledged a request received from a client application. This event is a response to the `TSendUserEvent()`, `TSendEvent()`, `TSendEventEx()`, `TSetInputMask()`, `TTransactionMonitoring()`, and `TPrivateSevice()` functions.


Contents

Event Attribute	Type
Event	Mandatory
ReferenceID	Mandatory
Server	Mandatory
time	Mandatory
UserEvent ^a	Optional
Extensions	Optional
SubscriptionID	Optional ^b


a. UserEvent is the identifier of the request that has caused T-Server to generate EventACK. The attribute is derived from the request.

b. This attribute, applicable only to EventACK in response to `TTransactionMonitoring()`, is mandatory for the operation `SubscriptionStart`, but is not present for the operations `SubscriptionStop` and `SubscriptionModify`. This attribute represents a subscription identifier: the call has successfully reached the remote switch.

Examples

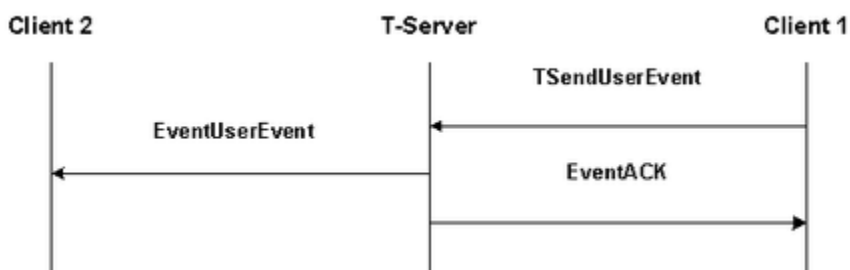

EventACK Feature, Example 1

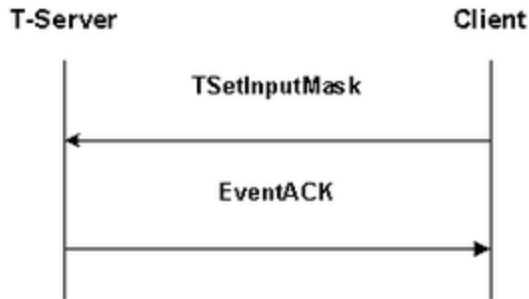

EventACK Feature, Example 2

EventAgentReserved

Description

This event is generated as a positive response to the `TReserveAgent()` request, confirming that those of the parameters `agent_dn`, `agent_id`, and `agent_place` that were present in the request have been successfully reserved. When an agent becomes reserved as the result of `TReserveAgent()` request, the event is sent to the application that sent the request and to all clients registered on the agent's DN.

Contents

Event Attribute	Type
AgentID ^a	Optional
Event	Mandatory
Place ^a	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN ^a	Optional
Timeout ^b	Optional
time	Mandatory
Extensions	Optional

a. At least one of the AgentID, Place, or ThisDN attributes must be present. The attributes are equal to the corresponding parameters of the `TReserveAgent()` function.

b. The duration of the reservation is in milliseconds.

EventCallInfoChanged

Description

The call information has been changed.

Contents

Event Attribute	Type
ConnID	Mandatory
CustomerID	Optional
Event	Mandatory
Extensions	Optional
ReferenceID	Optional
Server	Mandatory
time	Mandatory

EventPrivateInfo

Description

This event is generated both in response to a `TPrivateService()` function call and when it is used to notify selected sets of clients of T-Server-specific information. This event indicates that one of two forms of data has been passed:

- Information supported only by certain T-Servers, and which is not covered by general feature requests.
- Notification about changes in T-Server behavior or device/call statuses.

This event can be distributed to the following clients:


- Those who made a request for the private service, `TPrivateService()`.
- Those registered on the specified device, depending on the nature of the service.
- Those who would otherwise be ineligible (for security reasons) for receiving given events, and who thus require additional registration in order to be notified.

Contents

Event Attribute	Type
PrivateEvent	Mandatory
Event	Mandatory

Event Attribute	Type
Reasons	Optional
UserData	Optional
Extensions	Optional
ReferenceID	Optional
Server	Mandatory
ConnID	Optional
ThisDN	Optional
time	Mandatory

Example

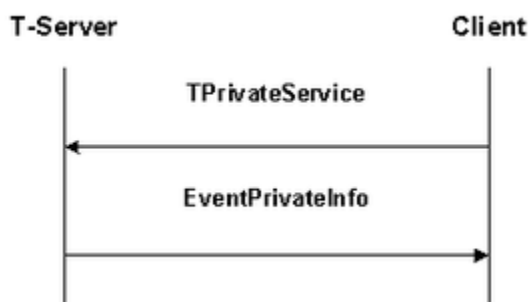

EventPrivateInfo Feature Example

EventUserEvent

Description

A user event from another client application has been received.

Contents

EventUserEvent contains T-Server-required attributes. Other attributes are specified by the initiator of this event.

Event Attribute	Type
CustomerID	Optional
Event	Mandatory
Server	Mandatory
ThisDN	Mandatory
time	Mandatory

Event Attribute	Type
Extensions	Optional

EventPrimaryChanged

Description

A change in the role of one of a pair of synchronized T-Servers in hot standby mode has taken place: the T-Server's role has been changed from backup to primary.

Warning

After a client receives `EventPrimaryChanged`, it should re-synchronize with the new primary T-Server (the one reporting this event) by calling the `TQueryLocation()` function and either the `TQueryAddress()` or `TQueryCall()` function.

If T-Server issues `EventPrimaryChanged`, and the two T-Servers have different link statuses at the time of switchover, `EventLinkDisconnected` or `EventLinkConnected` is generated as follows:

- If the former primary T-Server has its link connected, and the new one does not, `EventLinkDisconnected` is delivered just prior to `EventPrimaryChanged`.
- If the former primary T-Server has its link disconnected, and the new one has its link connected, `EventLinkConnected` is delivered immediately after `EventPrimaryChanged`.

The ordering of these messages is intended to simplify the processing logic on the client side—receiving `EventPrimaryChanged` when the link is disconnected may be safely ignored.

Important

The event generated for a primary-to-backup switchover—**`EventRestoreConnection`**—is different from `EventPrimaryChanged` in that it is processed internally by T-Library and is never delivered to clients.

Contents

Event Attribute	Type
ApplicationName	Optional
time	Mandatory

EventRestoreConnection

Description

A synchronized connection between a pair of T-Servers in hot standby mode has been established, or the T-Server's role has been changed from primary to backup.

Contents

Important

EventRestoreConnection is processed internally by T-Library, and is not delivered to the user dispatch function. As such, it does not use the conventional event contents structure.

Attributes

- **ServerRole**—The primary T-Server generates EventRestoreConnection, with the attribute ServerRole set to 0, when the connection to the backup T-Server has been established. T-Server generates EventRestoreConnection and sets the attribute ServerRole to 1 to indicate that it has been changed from the primary to the backup T-Server. This value is used to prevent a race condition in situations where two or more switchovers happen within a short interval of time. (Otherwise, T-Library relies on EventPrimaryChanged to identify the primary T-Server.)
- **UserData**—This attribute contains the reference to the backup T-Server. T-Library uses this information to try to connect to that server.

EventHardwareError

Description

T-Server has detected inconsistent data or an incomplete event flow in switch messaging—for instance, a wrong checksum or missing attributes.

Contents

Event Attribute	Type
CustomerID	Optional
ThisDN	Optional
ConnID	Optional
PreviousConnID	Optional

Event Attribute	Type
ErrorCode	Optional
Event	Mandatory
Server	Mandatory
time	Mandatory
Extensions	Optional

EventResourceAllocated (Obsolete—No Longer Supported)

Description

The switch has registered the CTI link to receive events about the specified telephony object.

EventResourceFreed (Obsolete—No Longer Supported)

Description

The switch has canceled registration of the CTI link, so that it no longer can receive events about the specified telephony object.